

Fixed Panic Switch

The MK-3045 fixed panic switch is available with lead or terminal connections. This critical security and life safety device can be mounted out of sight but within easy reach for activation, such as under desks or counters, in freezers or any facility where people and property are at risk.



CONSTRUCTION & TECHNICAL SPECIFICATIONS

Max Current: 0.25A

Resistive Max Voltage: 30 VDC

Max Power: .25 W

Resistive Configuration: "Closed Loop"
with Target Magnet in Place

Conductor: Screw Terminals
or 2 x 12" [30.5cm] 22AWG



Leads Color: White

Housing: ABS

MK-3045L
with Leads


MK-3045T
Screw Terminals

MAGNASPHERE®

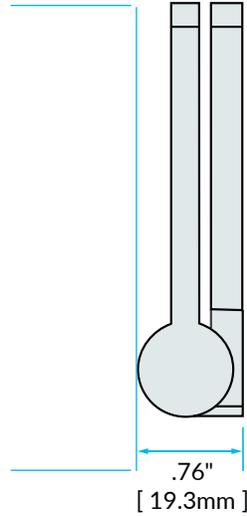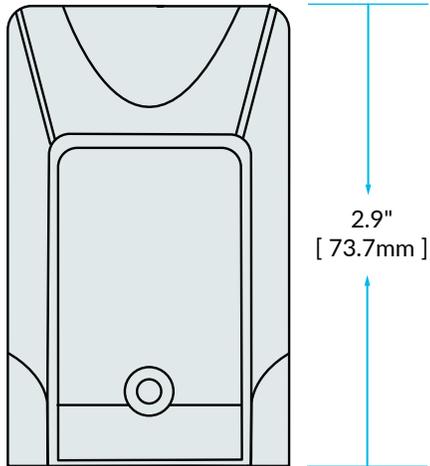

Positive Locking when in Closed Position

For cold room/refrigerator installs the MK-3045 with leads should be used.

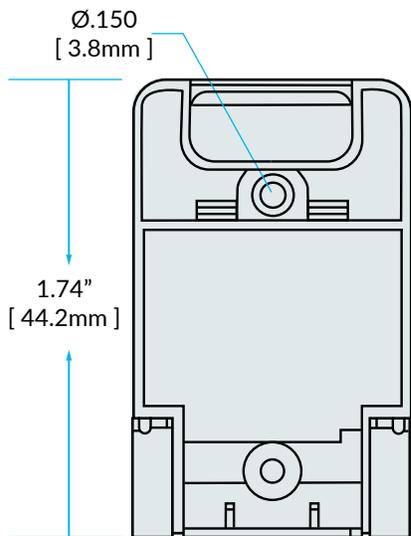

NOMENCLATURE

