

Fire Door Contacts

MAGNASPHERE®

UL10C Miscellaneous Fire Door Accessories Positive Pressure Tested

Fire Door Accessories classified in accordance to UL10C for use with Fire Doors and Frames up to and including 3 hours



Fire doors can help compartmentalize a building, prevent the spread of smoke and flames, and protect egress routes to allow for safe escape. However, they must be properly specified, installed, and maintained to provide the necessary protection.

MAGNASPHERE Fire Door Contacts can be used with the confidence that communication with your Intrusion, Access Control and Building Management Systems meet the necessary requirements for all classes of these doors and frames.



The MAGNASPHERE switch **will not** break, and **resists** permanent contact welding and magnetic tamper attempts.



(262) 347-0711
info@magnasphere.com
www.magnasphere.com



MAGNASPHERE Door Contacts

FOR USE WITH UL RATED FIRE DOORS AND FRAMES




UL 634 LEVEL 2
High Security
Listed Contacts

Concealed Mount Series
HSS-L2C-XXX-A-FIRE

ALL MODELS - Add Suffix - FIRE TO MODEL #
(SEE P. 35 OF SECURITY PRODUCTS CATALOG)
<https://magnasphere.com/documents/>

RATED: 3 HOURS

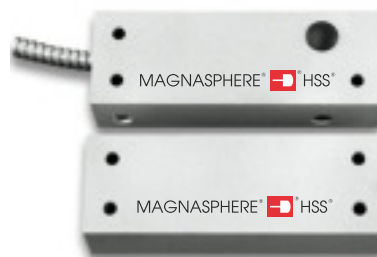

Surface Mount Series
HSS-L2S-XXX-FIRE / HSS-L2D-XXX-FIRE

ALL MODELS - Add Suffix - FIRE TO MODEL #
(SEE P. 22-25 OF SECURITY PRODUCTS CATALOG)
<https://magnasphere.com/documents/>

RATED: 20 MINUTES

UL 634 LEVEL 1
High Security
Listed Contacts

Surface Mount Series
HS-LI.5-XXX-FIRE

ALL MODELS - Add Suffix - FIRE TO MODEL #
(SEE P. 19 OF SECURITY PRODUCTS CATALOG)
<https://magnasphere.com/documents/>

RATED: 45 MINUTES



UL 634 Listed
Security Contacts

Concealed Mount Series
MSS-3XXC-FIRE

ALL MODELS - Add Suffix - FIRE TO MODEL #
(SEE P. 13-14 OF SECURITY PRODUCTS CATALOG)
<https://magnasphere.com/documents/>

RATED: 3 HOURS



Surface Mount Series
MSS-3XXS-FIRE

ALL MODELS - Add Suffix - FIRE TO MODEL #
(SEE P. 15-16 OF SECURITY PRODUCTS CATALOG)
<https://magnasphere.com/documents/>

RATED: 3 HOURS

