
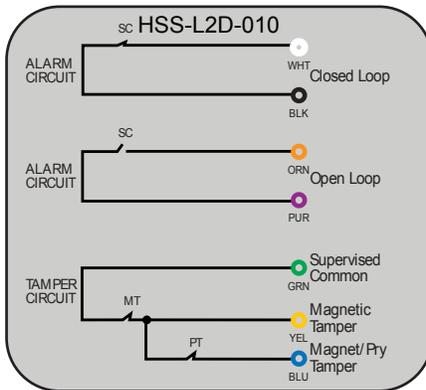
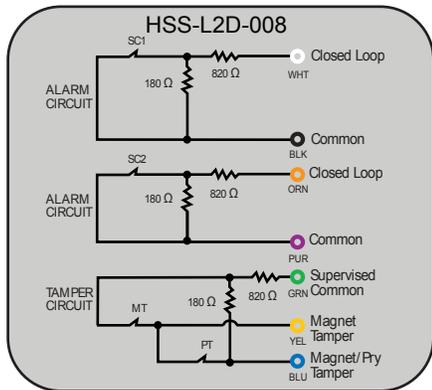
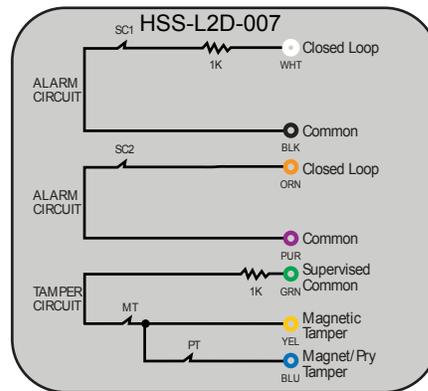
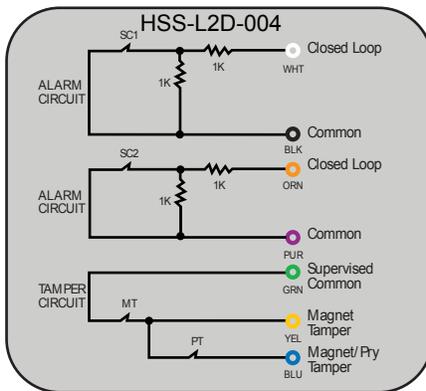
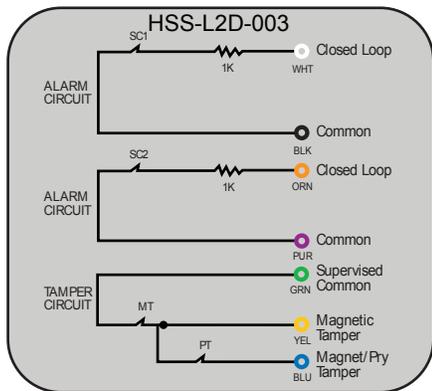
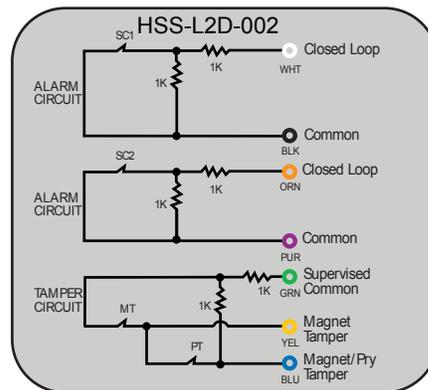
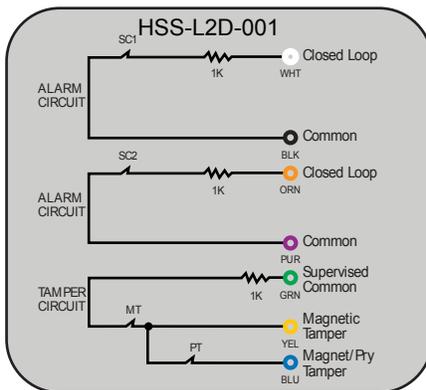


## Model L2D Series

### HSS PART NUMBERING SYSTEM L2D-XXX

Dual Alarm Contacts Both Closed Loop, with Tamper Circuit, Closed Loop. All Circuits Shown with Magnet Actuator in Secure Position. For Built-in EOL Resistor Configurations and Values not Shown. Contact Magnasphere Corp.

#### Available Part Numbers



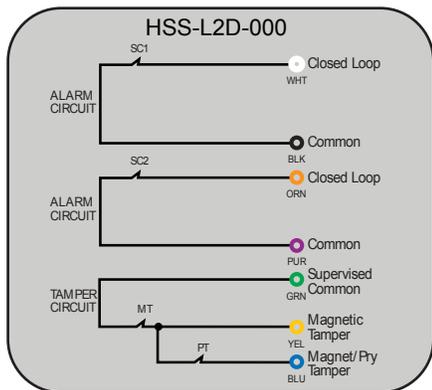


#### Legend / Notes

SC = Secure Contact  
 MT = Magnet Tamper  
 PT = Pry Tamper  
 ##K = Resistor

36" [91cm] Armored Cable (Std.),  
 (See Page 41 for Custom Cable Length)

## Available Part Numbers

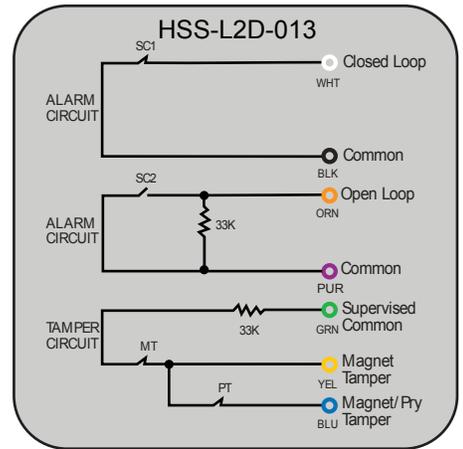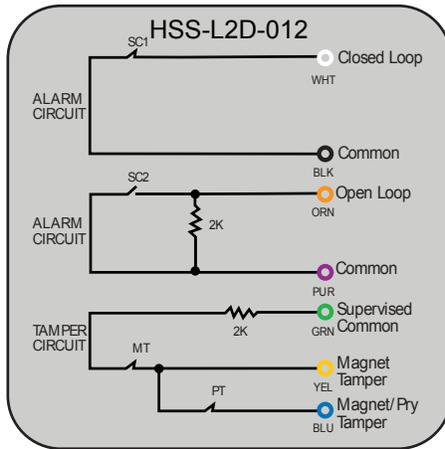
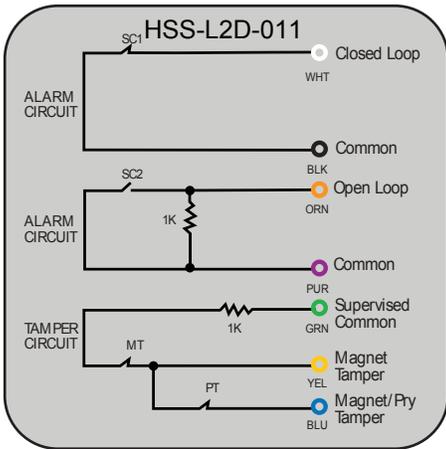


**L2D-014-**

WE-1K-J1-LS-J2-BK:J1-1K-J2:OE-1K-LS-PE:GN-1K-MT-J3-YW:J3-PT-BE

**L2D-015**

WE-1K-J1-LS-J2-BK:J1-1K-J2:OE-J3-NS-J4-MT-PT-BE:J3-1K-J4

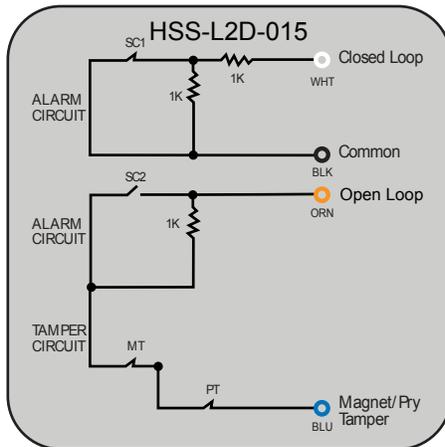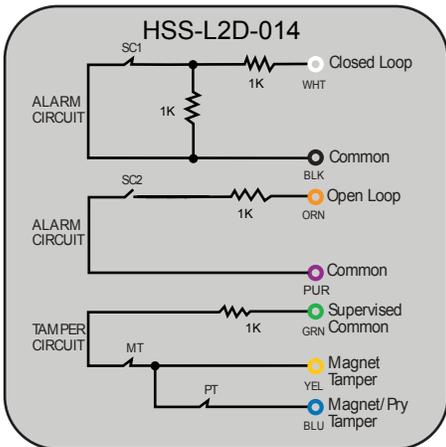

### Legend

SC = Secure Contact  
 MT = Magnet Tamper  
 PT = Pry Tamper  
 ##K = Resistor

36" [91cm] Armored Cable (Std.),  
 (See Page 41 for Custom Cable Length)